

The basic build up of a 9300 booth

The booth consists of 8 interchangeable wall panels. Any panel can be placed on any position. This is a unique feature that allows to set-up the booth in any desired configuration.

The basic build up starts with one corner of the 9300 booth. Simply connect a window and blind panel with a corner post profile by using the supplied alan key.

Easily work your self around the booth and finish the booth by adding the 2 roof panels on the booth and place the ventilation units on the roof. The table is easy to install without using tools at all.


Benefits:

- ▲ Easy installation, can be performed by 1 person
- ▲ Good working environment
- ▲ Clear view windows (safety glass)
- ▲ Cable ducts in the side panels
- ▲ Durable build
- ▲ Meets ISO 4043 and DIN 56924
- ▲ 2-tone panel decoration (inside)
- ▲ Expandable up to 4 persons
(options see page 26)

Options:

- ▲ Extensions set's
- ▲ Flightcase top loader
- ▲ Flightcase front oader
- ▲ Transport cart
- ▲ Other colours and finishing's on request

Silent 9300 series sound insulation capacity

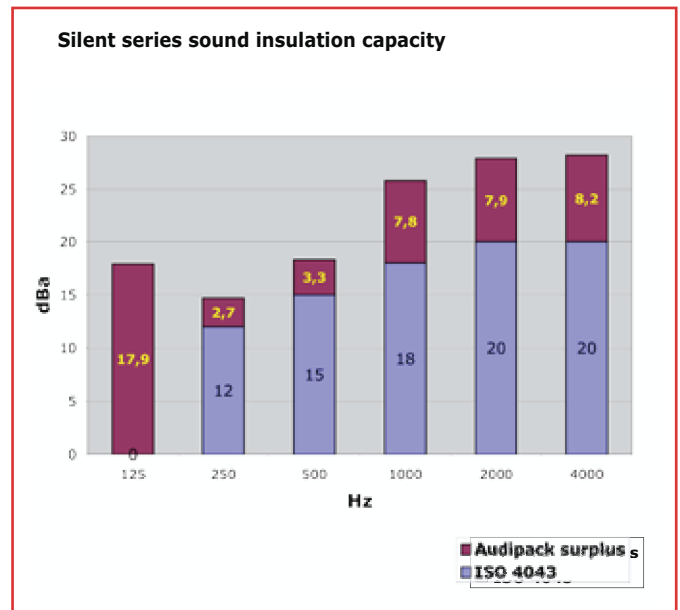

Technical testing specifications:

| | |
|---------------|-------------|
| Signal | Pink noise |
| Bandwidth: | 1/3 octaves |
| DW (ISO 717): | 24 db |





Technical specifications Audipack Silent 9300 interpreter booth

| Dimensions: | |
|--|---------------------------------------|
| Standard internal dimensions | 1600 x 1600 x 2000 mm |
| Standard external dimensions | 1682 x 1682 x 2041 mm |
| Booth height including ventilation system A | 2118 mm |
| Booth height including ventilation system B | 2212 mm |
| Standard table dimensions | 1600 x 500 mm |
| Sound insulation capacity | Better than ISO 4043 (latest version) |
| Number of booth parts including table | 11 parts |

| Weight: | |
|---|----------------|
| Weight (total incl. Safety glass, table) | Approx. 210 Kg |
| Blind panel | Approx. 17 Kg |
| Window panel | Approx. 22 Kg |
| Roof panel + optional ventilation system A | Approx. 18 Kg |
| Door panel Approx. | 19 Kg |
| Working table (50 cm depth) | Approx. 8 Kg |
| Ventilation system A | Approx. 6 Kg |
| Ventilation system B | Approx. 3.5 Kg |

| Colours: | |
|---|-----------------------------------|
| Standard colour exterior | Grey, code 871 (approx. RAL 7042) |
| Standard colours interior: | |
| -Wall panels from floor to table height | Dark grey |
| -Wall panels from table height to top and roof panels | White |

| Options: | |
|---|--|
| Extension set for extending a standard booth to 3 or 4 persons (internal 2400/3200 x 1600 x 2000 mm). | |
| Including window panel, blind panel, roof element and table extension 800 x 500 mm | |
| Flightcase (front loader or top loader) for 2 person booth | |
| Flightcase for Silent 9300 3 person booth | |
| Flightcase for 3 extension sets | |
| Booth transport car "easy drive" | |
| Ventilation system A (fixed) | |
| Ventilation system B (detachable) | |
| Other colours on request | |

